

Enpirion Tape and Reel Specification

Reel Dimension and Pin 1 Quadrant Locations


Product	Package Body size	Qty/reel	Reel Dimensions			Pin 1 Quadrant
			Dia (A)	Width (W1)	Hub Dia (N)	
EN5311QI	5 X 4	1000	180	12.4	60	1
EN5312QI	5 X 4	1000	180	12.4	60	1
EN5322QI	6 X 4	500	180	12.4	60	2
EN5335QI	10 X 7.5	500	180	24.4	60	2
EN5336QI	10 X 7.5	500	180	24.4	60	2
EN5337QI	7 X 4	500	180	16.4	60	2
EN5364QI	11 X 8	500	180	24.4	60	2
EN5365QI	12 X 10	250	180	24.4	60	2
EN5366QI	12 X 10	250	180	24.4	60	2
EN5394QI	11 X 8	500	180	24.4	60	2
EN5395QI	12 X 10	250	180	24.4	60	2
EN5396QI	12 X 10	250	180	24.4	60	2
EP5352QI	5 X 4	1000	180	12.4	60	1
EP5357HUI	2.5 x 2.25	1000	180	12.4	60	2
EP5357LUI	2.5 x 2.25	1000	180	12.4	60	2
EP5358HUI	2.5 x 2.25	1000	180	12.4	60	2
EP5358LUI	2.5 x 2.25	1000	180	12.4	60	2
EP5362QI	5 X 4	1000	180	12.4	60	1
EP5367HQI	3 X 3	1000	180	12.4	60	2
EP5367LQI	3 X 3	1000	180	12.4	60	2
EP5368QI	3 X 3	1000	180	12.4	60	2
EP5382QI	5 X 4	1000	180	12.4	60	1
EP5387HQI	3 X 3	1000	180	12.4	60	2
EP5387LQI	3 X 3	1000	180	12.4	60	2
EP5388QI	3 X 3	1000	180	12.4	60	2
EP53A7HQI	3 X 3	1000	180	12.4	60	2
EP53A7LQI	3 X 3	1000	180	12.4	60	2
EP53A8HQI	3 X 3	1000	180	12.4	60	2
EP53A8LQI	3 X 3	1000	180	12.4	60	2
EP53F8QI	3 X 3	1000	180	12.4	60	2

Notes:


All dimensions are typical

Unit of measure is millimeters


Reel Dimensions

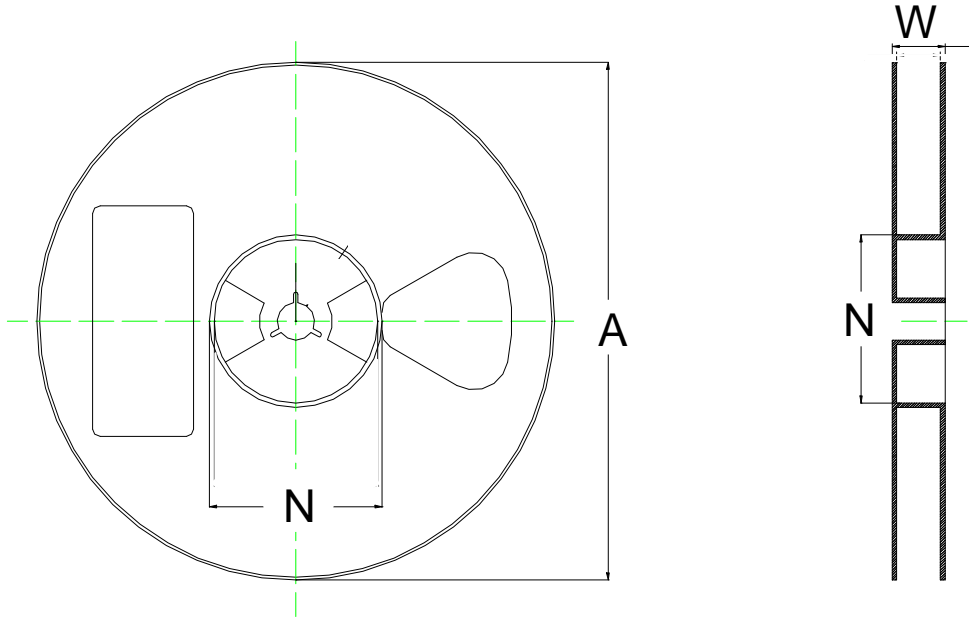

Pin 1 Quadrant Locations

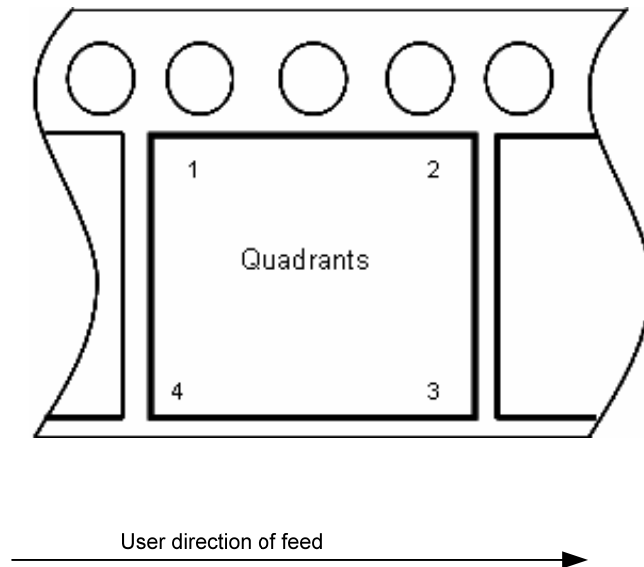

Tape Specifications

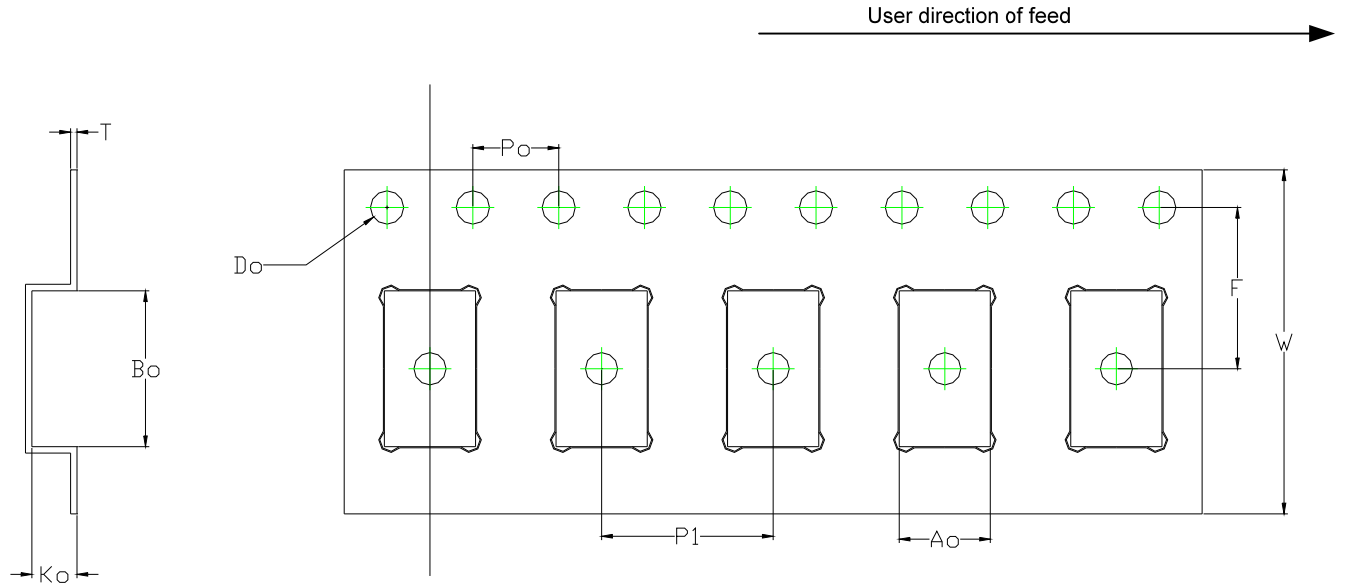

	Package Body Size								Tolerance
	2.5 x 2.25	3 X 3	5 X 4	6 X 4	7 X 4	10 X 7.5	11 X 8	12 X 10	
A0	2.55	3.30	4.30	4.30	4.25	7.90	8.25	10.40	± 0.10
B0	2.80	3.30	5.30	6.30	7.25	10.40	11.25	12.40	± 0.10
K0	1.40	1.30	1.30	1.30	2.10	2.20	2.10	2.20	± 0.10
F	5.50	5.50	5.50	5.50	7.50	11.50	11.50	11.50	± 0.10
P0	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	± 0.10
P1	4.00	8.00	8.00	8.00	8.00	12.00	12.00	16.00	± 0.10
P2	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	± 0.10
D0	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	± 0.05
W	12.00	12.00	12.00	12.00	16.00	24.00	24.00	24.00	± 0.30

Notes:

1. Material is conductive polystyrene
2. All dimensions are in millimeters
3. All specifications comply with EIA 481C
4. The cavity shall surround the component with sufficient clearance that:
 - a) the component does not protrude beyond either surface of the carrier tape.
 - b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
 - c) rotation of the component is limited to 20° maximum
 - d) lateral movement of the component is restricted to 0.5 mm maximum



Contact Information

Enpirion, Inc.
Perryville III
53 Frontage Road, Suite 210
Hampton, NJ 08827
Phone: 908-894-6000
Fax: 908-894-6090

Enpirion reserves the right to make changes in circuit design and/or specifications at any time without notice. Information furnished by Enpirion is believed to be accurate and reliable. Enpirion assumes no responsibility for its use or for infringement of patents or other third party rights, which may result from its use. Enpirion products are not authorized for use in nuclear control systems, as critical components in life support systems or equipment used in hazardous environment without the express written authority from Enpirion.